



Product Specification


Dual Check Valves

Application:

Dual checks provide protection to the potable water supply from contamination in low hazard applications like meter connections on domestic properties.

Specifications:

- Body: Bronze
- Check Springs: Stainless steel
- Minimum Working Pressure 220kPa
- Maximum Working Pressure 1200kPa
- Compact and lightweight
- Corrosion resistant
- Independently operating check valves
- Operating temperature range of 1°C to 60°C
- Suitable for vertical and horizontal installations
- Approved to AS 2845-1

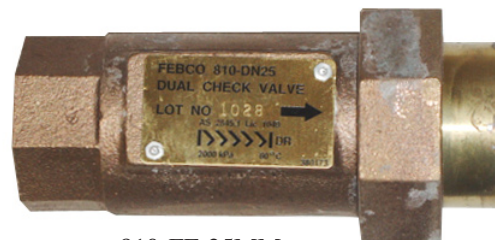

810-FF-25MM

* Low Hazard Rating



AS2845.1

Lic 1335

Description	Order Code
20mm Dual Check F x F 20mm	810-FF-20MM
25mm Dual Check F x F 25mm	810-FF-25MM
25mm Dual Check M x F 25mm	810-MF-25MM

E-MAIL

hrproducts@bigpond.com

WEB SITE

www.hrproducts.com.au

PERTH

207 BANNISTER ROAD
CANNING VALE
WESTERN AUSTRALIA 6155
PHONE: (08) 9455 1677
TOLL FREE: 1 800 998 037

ADELAIDE

Cnr WILSON ST & FREDERICK RD
ROYAL PARK
SOUTH AUSTRALIA 5014
PHONE: (08) 8341 0008
TOLL FREE: 1 800 888 125

BRISBANE

14-16 TOLMER PLACE
SPRINGWOOD
QUEENSLAND 4127
PHONE: (07) 3290 1200
TOLL FREE: 1 800 777 325

SYDNEY

11-13 SAMMUT STREET
SMITHFIELD
NSW 2164
PHONE: (02) 9725 5733
TOLL FREE: 1 800 251 945

MELBOURNE

Cnr Waterdale Rd & Vernon Ave
HEIDELBERG HEIGHTS
VICTORIA 3081
PHONE: (03) 9457 7500
TOLL FREE: 1 800 331 168

MACKAY

MOBILE: 0418 742 144

COBRAM

MOBILE: 0417 054 475

NEWCASTLE

MOBILE: 0418 292 769

DUBBO

MOBILE: 0409 489 092