

PRODUCT SPECIFICATION



PVC BALL VALVE STORM WATER FEATURES

- Full bore
- UV Stabilised
- Solvent Weld connections
- Designed to fit storm water pipe
- Must be operated in fully open or closed position
- Designed for use in irrigation systems, not compliant to Australian plumbing codes or Standards
- All valves pressure tested during production
- Size range: 90mm to 100mm

SPECIFICATIONS

- Temperature Range: 0° to 40°C
- Maximum operating pressure at nominal temperatures: 1000kPa



MODELS	DESCRIPTION	CODE
90mm	90mm PVC Ball Valve Stormwater	3005090
100mm	100mm PVC Ball Valve Stormwater	3005100

Specifications Subject to Change Without Notice - Product Drawings / Images are representative only and are subject to change

PERTH

PH: 08 9455 1677
FAX: 08 9455 1680
hrsales@hrproducts.com.au

SYDNEY

PH: 02 9725 5733
FAX: 02 725 5283
infonsw@hrproducts.com.au

MELBOURNE

PH: 03 9457 7500
FAX: 03 9457 7400
infovic@hrproducts.com.au

BRISBANE

PH: 07 3806 0522
FAX: 07 3806 0533
infoqld@hrproducts.com.au

ADELAIDE


PH: 08 8341 0008
FAX: 08 8341 0707
infosasa@hrproducts.com.au

PRODUCT SPECIFICATION



PVC BALL VALVE STORM WATER

DIMENSIONAL AND COMPONENT DIAGRAM

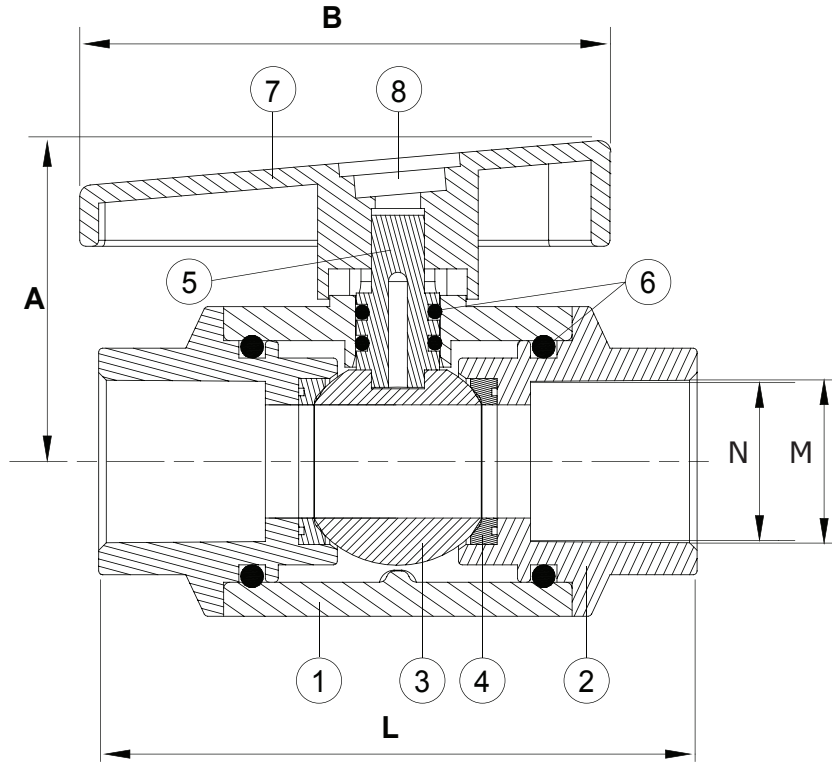

MATERIALS		
POS.	PART NAME	MATERIALS
1	BODY	PVC
2	END ADAPTOR	PVC
3	BALL	PVC
4	SEAL	PP+EPDM
5	STEM	PVC
6	O-RINGS	EPDM
7	HANDLE	ABS
8	CAP	ABS

DIMENSIONS - MM										
PROD.CODE	SIZE	A	B	L	M	N	Kv	WGT kg		
3005090	90	126	205	205	90	89.3	394	10.39		
3005100	100	150	260	254	110.4	110.1	514	17.30		

Specifications Subject to Change Without Notice - Product Drawings / Images are representative only and are subject to change

PERTH
PH: 08 9455 1677
FAX: 08 9455 1680
hrsales@hrproducts.com.au

SYDNEY
PH: 02 9725 5733
FAX: 02 725 5283
infonsw@hrproducts.com.au

MELBOURNE
PH: 03 9457 7500
FAX: 03 9457 7400
infovic@hrproducts.com.au

BRISBANE
PH: 07 3806 0522
FAX: 07 3806 0533
infoqld@hrproducts.com.au

ADELAIDE
PH: 08 8341 0008
FAX: 08 8341 0707
infoasa@hrproducts.com.au