



MEDIA FILTER - SERIES 4000

Odis series 4000 gravel or sand filters, are most efficient for the filtration of water heavily contaminated with algae, organic matter and other impurities, such as in open reservoirs and recycled water systems.

Operating Principle:

Water enters the filter via the inlet located on top of tank and spreads evenly on the media. Dirt particles and organic materials are trapped on the media surface. The clean water percolates through the media and flows out via the filter elements. The cleaning backwash process is done by shutting the inlet of the filter and allowing water to enter from the bottom, lifting the media and releasing the dirt particles that exit the filter through the top drain pipe. This process can be controlled automatically.

FEATURES

- Series 4000 filters use a unique design based on a bottom double-chamber, divided by a steel plate covered by “mushroom shape” diffusers
- These diffusers disperse water evenly, using effectively the whole filter’s volume, which avoids the occurrence of channeling or caking
- Uses media for depth filtration
- Modular design - suitable for use in arrays for various flow rates
- 120 micron extra-durable polyester, applied electrostatically and oven-cured on a zinc-phosphate layer for maximal anti-corrosion protection

APPLICATIONS

- Used as a Primary filter for water from open reservoirs and recycled water
- Most effective for filtration of water heavily contaminated with algae and organic matter

SPECIFICATIONS

Media size:	0.8mm - 1.2mm crushed quartz
Recommended Flow Range:	Up to 466lpm (Tank sizes: 300mm - 600mm Diameter)
Maximum recommended working pressure:	800kPa
Maximum pressure:	1000kPa
End Connection Type:	Threaded



MODELS	CODE
300mm Flow Range: Up to 100lpm	
300mm diameter x 25mm female bsp thread Media Filter	OD4121
400mm Flow Range: Up to 183lpm	
400mm diameter x 40mm female bsp thread Media Filter	OD41615
500mm Flow Range: Up to 300lpm	
500mm diameter x 50mm female bsp thread Media Filter	OD4202
600mm Flow Range: Up to 466lpm	
600mm diameter x 50mm female bsp thread Media Filter	OD4242

* See chart for recommended flow rates

FILTRATION_OD4000_V1.05-20

www.hrproducts.com.au





PRODUCT SPECIFICATION

FILTRATION


MEDIA FILTER - SERIES 4000

Head Loss

Model	Flow Rate Q (m ³ /h)												
	5	10	15	20	25	30	35	40	45	50	55	60	70
	Head Loss dP (bar)												
4121	0.08	0.31	0.69	1.23									
41615	0.04	0.16	0.36	0.64	1.00	1.44							
4202		0.10	0.22	0.39	0.61	0.88	1.20						
4203		0.06	0.13	0.24	0.37	0.54	0.73	0.95	1.20	1.49			
4242		0.04	0.09	0.15	0.24	0.35	0.47	0.62	0.78	0.96	1.16		
4243				0.09	0.14	0.19	0.26	0.35	0.44	0.54	0.65	0.78	1.06

Model	Flow Rate Q (m ³ /h)															
	20	30	40	50	60	70	80	90	100	110	130	150	180	200	220	250
	Head Loss dP (bar)															
4303	0.06	0.14	0.26	0.40	0.58	0.79	1.03									
4363		0.07	0.13	0.20	0.28	0.38	0.50	0.63	0.78	0.95						
4484				0.06	0.08	0.11	0.15	0.19	0.23	0.28	0.39	0.53	0.76	0.93	1.13	
4604					0.05	0.06	0.08	0.10	0.13	0.15	0.21	0.28	0.41	0.50	0.61	0.79

Head Loss / Flow Rate

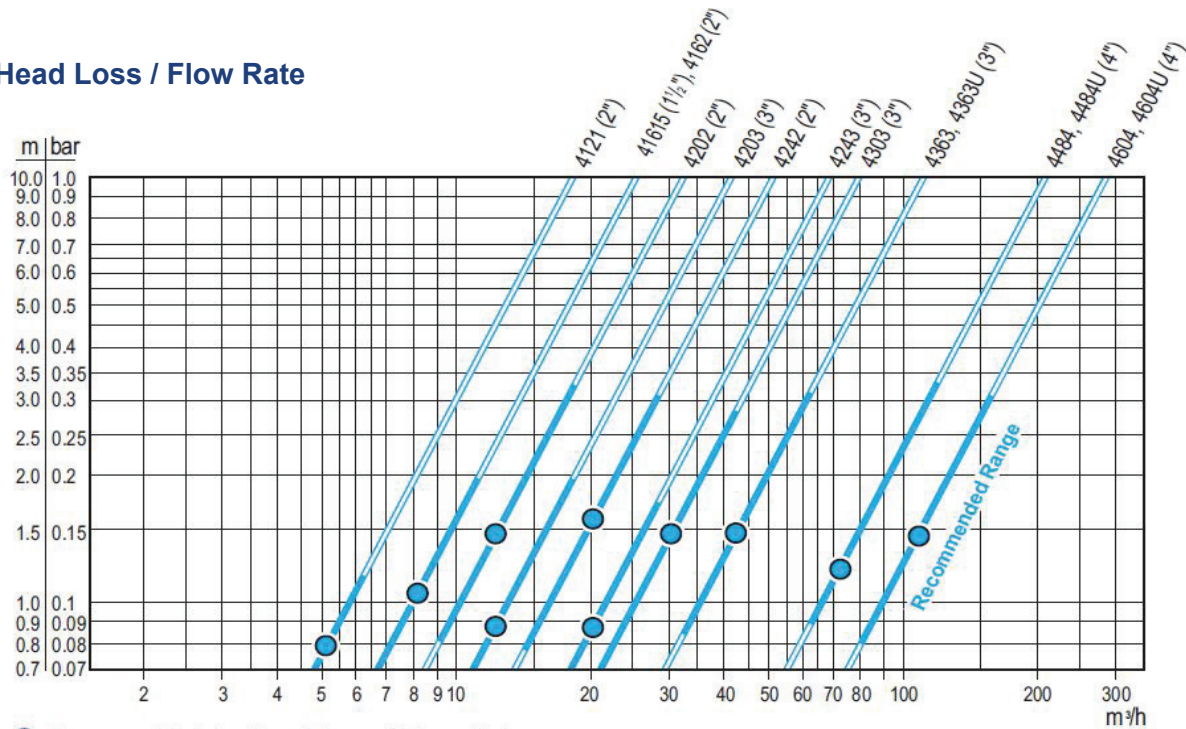

● Average Point - Head Loss / Flow Rate

■ 1 bar=100 kPa=1.02 kg/cm²=10.2 m (W.C)=14.5 psi

* Please check with your HR Sales Representative for stock availability

FILTRATION_OD4000_V1.05-20

www.hrproducts.com.au



PERTH

PH: 08 9484 6500

FAX: 08 9455 1680

hrsales@hrproducts.com.au

SYDNEY

PH: 02 9616 1300

FAX: 02 9725 5283

infonsw@hrproducts.com.au

MELBOURNE

PH: 03 8458 7400

FAX: 03 9457 7400

infovic@hrproducts.com.au

BRISBANE

PH: 07 3080 6200

FAX: 07 3806 0533

infoqld@hrproducts.com.au

ADELAIDE

PH: 08 8408 7200

FAX: 08 8341 0707

infosas@hrproducts.com.au



MEDIA FILTER - SERIES 4000

Recommended Flow Rates

Model	Inlet/ Outlet Diameter	Body Diameter	Recommended Flow Rate *			
			Minimum	Average*	Maximum	Back Flushing
	mm	mm	m ³ /h	m ³ /h	m ³ /h	m ³ /h
4121	25	300	3.5	5	6	7
41615	40	400	6	8	11	10
4202	50	500	9	12	18	15
4203	80	500	10	12	18	15
4242	50	600	14	20	28	25
4243	80	600	14	20	28	25
4303	80	750	21	30	42	38
4363	80	900	32	42	62	54
4484	100	1200	62	72	120	95
4604	100	1500	80	110	150	150

* Average water quality

** For dirty water reduce the flow rate

*** Larger tanks available upon request

FILTRATION_OD4000_V1.05-20

www.hrproducts.com.au



PERTH

PH: 08 9484 6500

FAX: 08 9455 1680

hrsales@hrproducts.com.au

SYDNEY

PH: 02 9616 1300

FAX: 02 9725 5283

infonsw@hrproducts.com.au

MELBOURNE

PH: 03 8458 7400

FAX: 03 9457 7400

infovic@hrproducts.com.au

BRISBANE

PH: 07 3080 6200

FAX: 07 3806 0533

infoqld@hrproducts.com.au

ADELAIDE

PH: 08 8408 7200


FAX: 08 8341 0707

infossa@hrproducts.com.au



MEDIA FILTER - SERIES 4000

FILTER DIMENSIONS

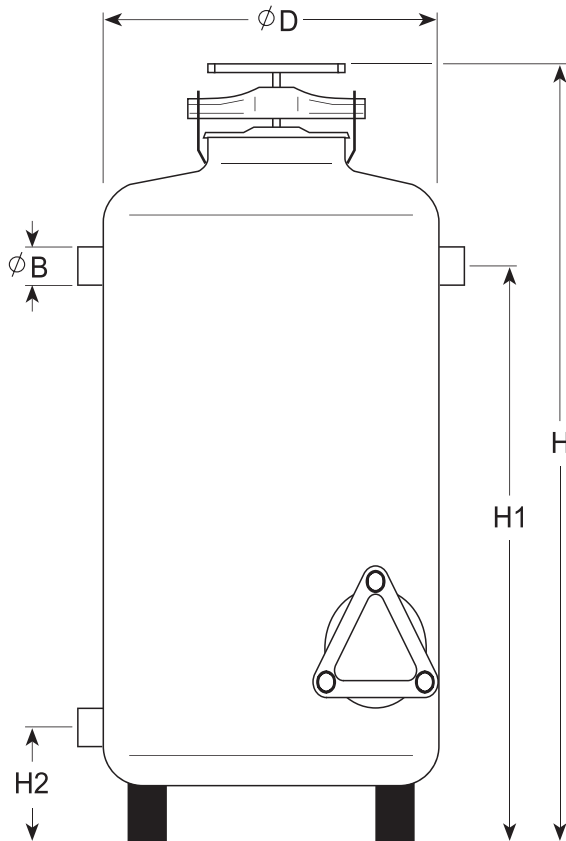

OD4121

Filter Dimensions

B: 25mm
D: 300mm
H: 1150mm
H1: 775mm
H2: 120mm
 Threaded End Connection

OD41615

Filter Dimensions

B: 40mm
D: 400mm
H: 1250mm
H1: 870mm
H2: 180mm
 Threaded End Connection

OD4202

Filter Dimensions

B: 50mm
D: 500mm
H: 1250mm
H1: 870mm
H2: 180mm
 Threaded End Connection

OD4242

Filter Dimensions

B: 50mm
D: 600mm
H: 1350mm
H1: 950mm
H2: 260mm
 Threaded End Connection

Gravel Filling

Models	Inlet / Outlet Diameters	Gravel Filling (kg)
OD4121	25mm	60
OD41615	40mm	90
OD4202	50mm	120
OD4242	50mm	180

FILTRATION_OD4000_V1.05-20

www.hrproducts.com.au



PERTH

PH: 08 9484 6500
 FAX: 08 9455 1680
hrsales@hrproducts.com.au

SYDNEY

PH: 02 9616 1300
 FAX: 02 9725 5283
infonsw@hrproducts.com.au

MELBOURNE

PH: 03 8458 7400
 FAX: 03 9457 7400
infovic@hrproducts.com.au

BRISBANE

PH: 07 3080 6200
 FAX: 07 3806 0533
infoqld@hrproducts.com.au

ADELAIDE

PH: 08 8408 7200
 FAX: 08 8341 0707
infosa@hrproducts.com.au