



CETA[®] PC Dripper



A take apart pressure compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

Features

- Take apart for easy inspection and cleaning.
- Self-flushing cleaning action at low pressure.
- Outlet includes anti-insect baffle to reduce risk of blockages.
- 4 mm barbed dripper range with colour coded bases for easy identification 2 lph (Red), 4 lph (Black) & 8 lph (Green).
- 4 mm barbed range available with 4 mm barbed outlet options.
- 4 lph PC Spike & In-Line Spike models to anchor CETA[®] at the plant root.
- Constructed of high quality UV, chemical & fertiliser resistant materials.

Applications

Pots, planter boxes, balcony, patios and landscape.

DRIPPERS

PRESSURE COMPENSATING



CETA[®] PC In-Line Spike 4 lph Inlet 4 mm

CETA[®] PC Spike 4 lph Inlet 4 mm

CETA[®] PC 2 lph Barb 4 mm Outlet 4 mm

CETA[®] PC 4 lph Barb 4 mm Outlet 4 mm

CETA[®] PC 8 lph Barb 4 mm Outlet 4 mm

Performance Chart

Pressure (kPa)	Flow (lph)			
	2 lph	4 lph	8 lph	
50	1.9	3.3	6.2	
100	2.0	3.8	7.9	
150	2.2	4.2	7.9	
200	2.3	4.4	8.1	
250	2.3	4.4	8.1	
300	2.3	4.4	8.0	
350	2.2	4.3	7.8	
MINIMUM FLOW PATH DIMENSION (mm)		0.7 x 0.6	0.8 x 0.8	1.2 x 0.9

Ordering Information - CETA[®] PC 4 lph Spike

Base Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Spike	30625	25	60	8.7
In-Line Spike	30655	25	50	7.7

Ordering Information - CETA[®] PC with 4 mm Barb Outlet

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph	30545	100	60	13.5
4 lph	30555	100	60	13.5
8 lph	30565	100	60	13.5

Specifications

Dimensions Assembled		CETA [®] PC with 4 mm barb outlet	CETA [®] PC Spike/ In-Line Spike
HEIGHT		35 mm	135 mm
WIDTH		20 mm	36 mm / 42 mm
DEPTH		16 mm	16 mm
WEIGHT (approx.)		2.0 g	5.0 g
UV STABILISED MATERIAL	BASE/SPIKE CAP DIAPHRAGM ADAPTOR	polypropylene polypropylene silicone rubber acetal	polypropylene polypropylene silicone rubber
CONNECTION TYPE:		Inlet BARB 4 mm	BARB 4 mm
		Outlet BARB 4 mm	SPOUT 4 mm

CETA® PC Dripper



A take apart pressure compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

Features

- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).
- Three colour coded flow rates: 2 lph (Red), 4 lph (Black) & 8 lph (Green).
- Self-flushing cleaning action at low pressures.
- Large clog resistant turbulent flow path.
- The CETA® dripper is able to be taken apart for inspection and cleaning.
- Anti-insect baffle to deter insect entry.
- Constructed of high quality UV, chemical & fertiliser resistant materials.

Applications

Vineyards, orchards, row crops and landscape.

Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.9	3.3	6.2
100	2.0	3.8	7.9
150	2.2	4.2	7.9
200	2.3	4.4	8.1
250	2.3	4.4	8.1
300	2.3	4.4	8.0
350	2.2	4.3	7.8
MINIMUM FLOW PATH DIMENSION (mm)			
	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9



CETA® PC
2 lph
Barb 4 mm




CETA® PC
4 lph
Barb 4 mm



CETA® PC
8 lph
Barb 4 mm

Flow Rate

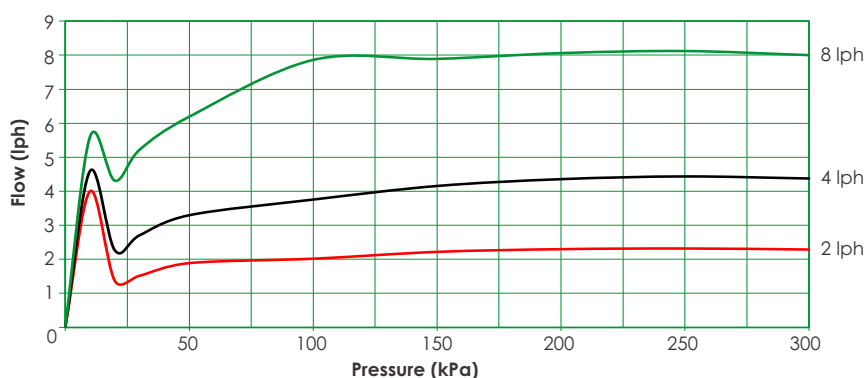

Ordering Information - CETA® PC Barb

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph	30425	100	70	13.3
4 lph	30445	100	70	13.3
8 lph	30485	100	70	13.3

Specifications

Dimensions Assembled		CETA® PC
HEIGHT		25 mm
WIDTH		20 mm
DEPTH		16 mm
WEIGHT (approx.)		1.7 g
UV STABILISED MATERIAL	BASE CAP DIAPHRAGM	polypropylene polypropylene silicone rubber
CONNECTION TYPE:		
	Inlet	BARB 4 mm
	Outlet	SPOUT 4 mm