



A pressure compensating drip emitter that provides a fixed diameter over a wide range of operating pressures. Gentle stream action with uniform coverage for all emitters on the same supply tube.

Features

- Pressure compensating operation maintains diameter of throw over a wide range of inlet pressures.
- Take apart for easy inspection and cleaning.
- Coloured cap for easy identification.
- UV stabilised materials for long life.
- Resistant to common agricultural chemicals & fertilisers.
- Patented design.


Applications

Pots, planter boxes, balcony, patio and landscape.

Performance Chart

Pressure (kPa)	360° ✱	
	Flow (lph)	Diameter (m)
100	24	0.3
150	29	0.4
200	33	0.4
250	36	0.4
300	38	0.4

Flow Rate

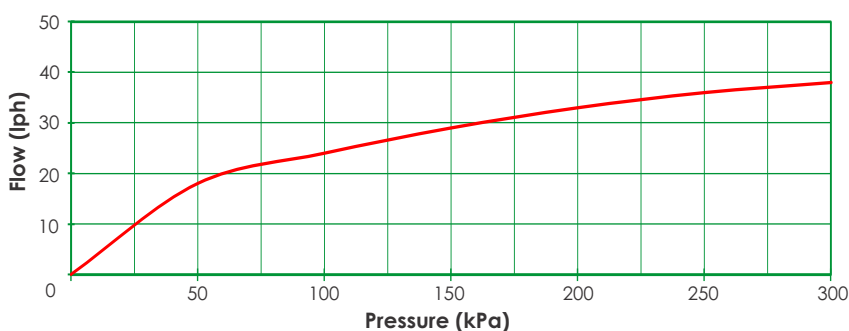

Shrubbler® 360° PC
Spike
Inlet 4 mm



Shrubbler® 360° PC
Barb 4 mm

Ordering Information - Shrubbler® 360° PC

Description	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Barb 4 mm	31685	100	70	13.1
Spike	31695	25	60	8.5

Specifications

Dimensions Assembled		Barb	Spike
HEIGHT		25 mm	135 mm
WIDTH		20 mm	16 mm
DIAMETER		15 mm	26 mm
WEIGHT (approx.)		1.7 g	5.4 g
UV STABILISED MATERIAL	BASE CAP DIAPHRAGM	polypropylene polypropylene silicone rubber	polypropylene polypropylene silicone rubber
BASE/CONNECTION TYPE:		Inlet BARB 4 mm	BARB 4 mm