



The Rotor Rain® Plus Pressure Compensating sprinkler provides a consistent performance over longer rows and on undulating terrain, delivering a more even application of water, fertilisers and chemicals through each sprinkler. Rotor Rain® Plus PC provides a more even sprinkler performance for all sprinkler on the same lateral line.

### Features

- Pressure Compensating for fixed outlet flows.
- Profiled double frame to maximise distribution uniformity.
- Snap off deflector option for young trees.
- Suspension hole for trellis applications
- Colour coded bases for easy flow rate identification.
- Easily disassembled for in-field maintenance.
- High grade silicone diaphragm for long service life.

### Applications

Orchards and row crops where input pressure varies or terrain is undulating.

SPRINKLERS

### Ordering Information - Rotor Rain® Plus PC 3/8" Male Thread

Nozzle Size & Colour	Order Code Standard Spinner	Order Code w/Deflector Spinner	Pack Quantity	Packs per Carton	Carton (kg)
0.8 mm <b>Brown</b>	32215	32315	50	20	11.7
0.9 mm <b>Dark Blue</b>	32225	32325	50	20	11.7
1.1 mm <b>Grey</b>	32235	32335	50	20	11.7
1.2 mm <b>Black</b>	32245	32345	50	20	11.7
1.4 mm <b>Orange</b>	32255	32355	50	20	11.7
1.6 mm <b>Red</b>	32265	32365	50	20	11.7
1.8 mm <b>Light Blue</b>	32275	-	50	20	11.7
2.0 mm <b>Yellow</b>	32285	-	50	20	11.7
2.3 mm <b>Purple</b>	32295	-	50	20	11.7
2.5 mm <b>Olive</b>	32305	-	50	20	11.7




Rotor Rain® Plus PC  
3/8" Male Thread



Rotor Rain® Plus PC  
with Deflector  
3/8" Male Thread

### Flow Rate

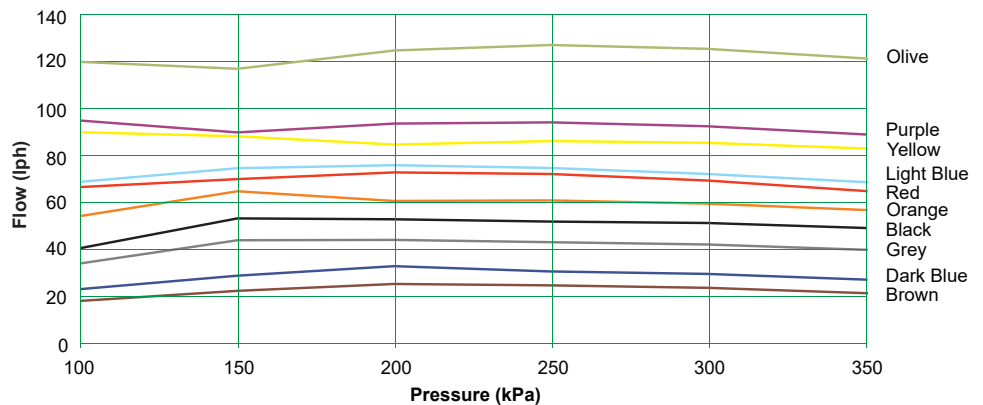

### Specifications

Dimensions Assembled		Rotor Rain® Plus 3/8"
HEIGHT		53 mm
WIDTH		46 mm
DEPTH		21 mm
WEIGHT (approx.)		11.0 g
UV STABILIZED MATERIALS	FRAME	acetal
	SPINNER	nylon
	NOZZLE	acetal
	DIAPHRAGM	silicone rubber
BASE/CONNECTION TYPE: INLET		thread 3/8" BSPM



**NEW**



## Ordering Information - Rotor Rain® Plus Assembly w/ 600 mm Tube & Adaptor

Nozzle Size & Colour	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
0.8 mm <b>Brown</b> - Standard Spinner	<b>32415</b>	10	8	5.3
0.9 mm <b>Dark Blue</b> - Standard Spinner	<b>32425</b>	10	8	5.3
1.1 mm <b>Grey</b> - Standard Spinner	<b>32435</b>	10	8	5.3
1.2 mm <b>Black</b> - Standard Spinner	<b>32445</b>	10	8	5.3
1.4 mm <b>Orange</b> - Standard Spinner	<b>32455</b>	10	8	5.3
1.6 mm <b>Red</b> - Standard Spinner	<b>32465</b>	10	8	5.3
1.8 mm <b>Light Blue</b> - Standard Spinner	<b>32475</b>	10	8	5.3
2.0 mm <b>Yellow</b> - Standard Spinner	<b>32485</b>	10	8	5.3
2.3 mm <b>Purple</b> - Standard Spinner	<b>32495</b>	10	8	5.3
2.5 mm <b>Olive</b> - Standard Spinner	<b>32505</b>	10	8	5.3
0.8 mm <b>Brown</b> w/ Deflector Spinner	<b>32515</b>	10	8	5.7
0.9 mm <b>Dark Blue</b> w/ Deflector Spinner	<b>32525</b>	10	8	5.7
1.1 mm <b>Grey</b> w/ Deflector Spinner	<b>32535</b>	10	8	5.7
1.2 mm <b>Black</b> w/ Deflector Spinner	<b>32545</b>	10	8	5.7
1.4 mm <b>Orange</b> w/ Deflector Spinner	<b>32555</b>	10	8	5.7



Rotor Stake™ Range

5mm - Code: **40555**  
10mm - Code: **40515**  
13mm - Code: **40535**

*\*Refer to page 54 for stake information*

with 600 mm Tube & Adaptor  
Rotor Rain® Plus PC Assembly



**NEW**

Socket Driver for Rotor Rain® Plus  
*\*Refer to page 59 for Socket Driver information*



SPRINKLERS