

Putting Water Where it Counts!®



REUZIT®

Recycled Water Products

Made in Australia

antelco.com

REUZIT® Recycled Water Products

ReuZit® range of products designed for domestic and small commercial Aerobic Treatment Systems (ATS) and recycled water systems.

Features

- Low operating pressure range ideal for recycled water sump pumps.
- ReuZit® FlatSpray and ReuZit® Sprinkler have a 0° trajectory, and ReuZit® DownSpray has a 45° down spray to reduce the effect of wind.
- 400 mm flexible off-take tubing with easy insert self piercing adaptor.
- Robust stake with push point for inserting into soil.
- Lilac coloured components for easy identification of recycled water.
- All ReuZit® emitters have a large orifice to reduce risk of clogging.
- Sprinkler Assembly with 13 mm barbed take-off to suit low density poly tubing.



Applications

Distribution of aerobically treated water under trees, shrubs and ground covers in mulched areas.

NEW Ordering Information - ReuZit® DownSpray

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
DownSpray Assembly w/ 400 mm Tube & Adaptor	41095	10	15	6.9
Replacement DownSpray	19066	10	TBA	TBA

Ordering Information - ReuZit® FlatSpray

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
FlatSpray Assembly w/ 400 m Tube & Adaptor	40595	10	10	5.4
Replacement FlatSpray	20615	10	30	2.2

Ordering Information - ReuZit® Sprinkler

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Sprinkler Assembly with Stake 13 mm Inlet	40585	10	8	5.4
Replacement Sprinkler 3/8" BSPM	21665	10	20	6.2
Sprinkler 1/2" BSPM	21575	10	20	6.4
Rotor Max™ Deflector	21365	10	28	4.8

NEW



NEW

ReuZit® DownSpray Assembly with 400 mm Tube & Self Piercing Adaptor

ReuZit® FlatSpray Assembly with 400 mm Tube & Self Piercing Adaptor



ReuZit®
Sprinkler
Assembly
with Stake
13 mm Inlet



ReuZit®
Sprinkler
1/2" BSPM



Rotor Max™
180° Deflector




Performance Chart

Pressure (kPa)	ReuZit® DownSpray Assembly		ReuZit® FlatSpray Assembly		ReuZit® Sprinkler Assembly	
	Tested at 0.2 m above ground		Tested at 0.2 m above ground		Tested at 0.2 m above ground	
	Flow (lph)	Diameter (m)	Flow (lph)	Diameter (m)	Flow (lph)	Diameter (m)
30	70	0.5	150	1.3	275	2.6
40	85	0.5	170	1.4	335	3.1
50	96	0.6	195	1.7	380	3.4
60	105	0.6	215	2.2	420	3.9
70	113	0.6	230	2.6	455	4.3
80	121	0.6	245	2.6	490	4.5
90	129	0.6	260	2.6	520	4.6
100	136	0.7	270	2.6	550	4.7

Specifications

		DownSpray Assembly	FlatSpray Assembly	Sprinkler Assembly	Sprinkler 1/2" BSPM
UV STABILISED MATERIALS	FRAME	acetal	acetal	polypropylene	polypropylene
	NOZZLE	acetal	acetal	polypropylene	polypropylene
	DEFLECTOR	-	acetal	-	-
	SPINNER	-	-	polypropylene	polypropylene
	SPRINKLER AD	-	polypropylene	-	-
	STAKE	polypropylene	polypropylene	polypropylene	-
	TUBE	PVC	PVC	-	-
ADAPTOR		acetal	acetal	polypropylene	-
BASE/CONNECTION TYPE:	INLET	barb 4mm	barb 4mm	barb 4mm	barb 4mm

Typical Aerobic
Treatment System

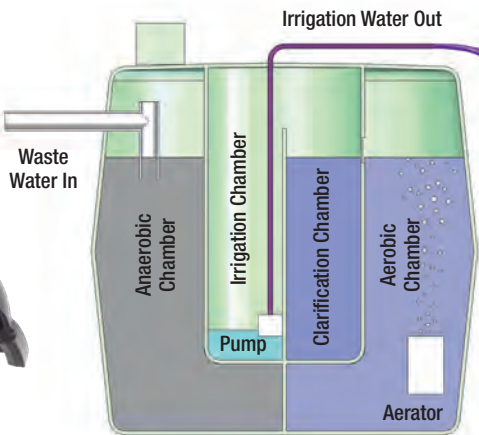

ReuZit® Sprinkler 1/2" BSPM



ReuZit® Sprinkler Assembly



ReuZit® FlatSpray Assembly



ReuZit® DownSpray
Assembly



Purple Back® Valve

Antelco Group of Companies

LINCOLN
— Est. 1959 —
MOULDING THE FUTURE

ANTELCO®

Dawn



Antelco Australia
Antelco Pty Ltd ABN 50 008 062 708
Sales & Marketing,
Orders & Warehouse
Research & Development
PO Box 95, 131 Tolley Rd,
St Agnes SA 5097 Australia
+61 8 8334 4333
adelaide@antelco.com.au

Antelco USA
Antelco Corporation
Sales & Marketing,
Orders & Warehouse
886 Waterway Pl,
Longwood,
Florida 32750 USA
+1 407 331 0699
info@antelco.com

Antelco Europe
Antelco UK Limited
Sales & Marketing,
Orders & Warehouse
17a Chartmoor Rd,
Leighton Buzzard,
Bedfordshire LU7 4WG UK
+44 152 585 9990
orders@antelco.co.uk