

Putting Water Where it Counts!®



CFd® DownSpray

Made in Australia

antelco.com

CFd® DownSpray

The patented C-Frame DownSpray is a 360° spray jet that distributes water evenly across the wetted surface area. Stake assembly options provide savings in labour and installation time.

Features


- 45° down spray reduces the effect of wind.
- Gentle spray minimises damage to delicate plant foliage.
- Stake assemblies **NEW** includes self piercing adaptor for easy installation into lateral tubing.
- 45° downspray pattern gives consistent pattern diameter with different inlet pressures making CFd® ideal for pot watering.
- Galvanised wire stake assembly incorporates shut-off clip to stop flow.
- Six colour coded frames to identify flow rates.
- “Quick” thread inlet with sealing barbs.
- UV stabilised materials.
- Diameter of spray pattern can be easily adjusted by raising or lowering the emitter height.



Scan to see how it works

Applications

Nurseries, tree lots, pot plants, home and landscaped gardens.

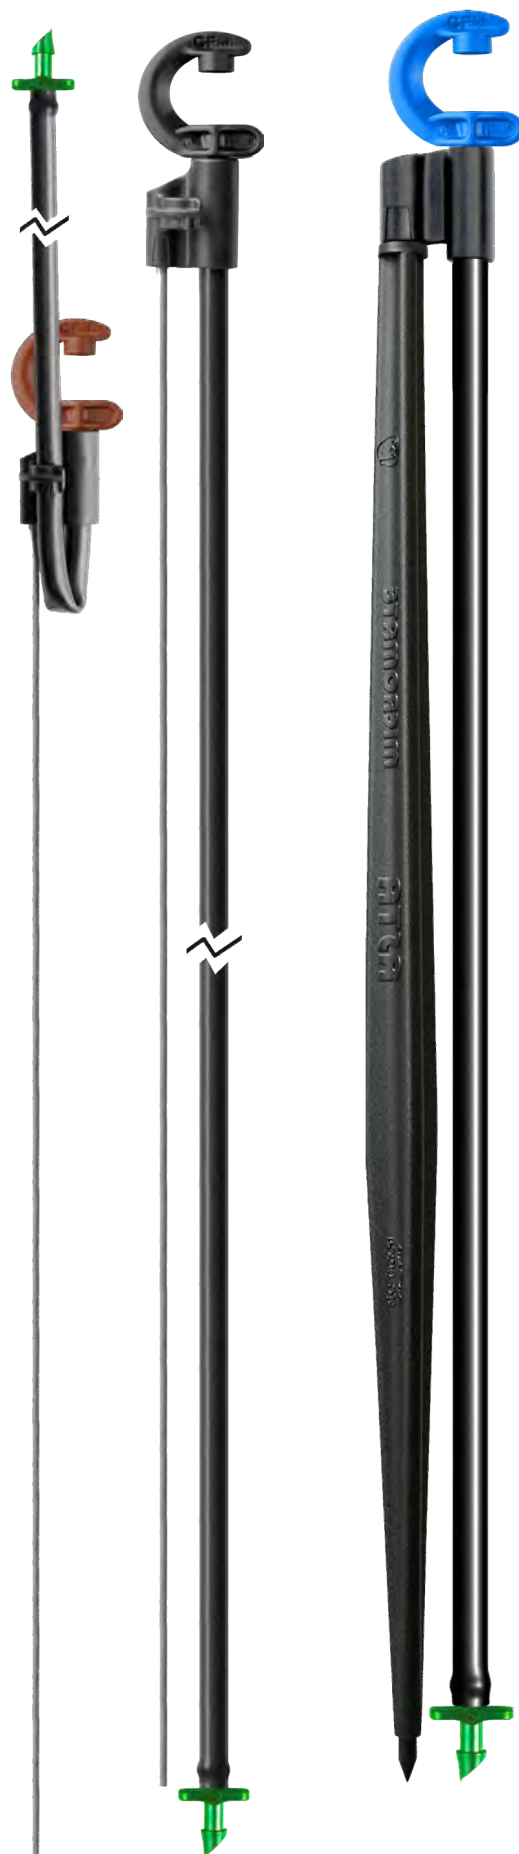

CFd® DownSpray Wire Stake Assembly with 914 mm Tube & Self Piercing Adaptor

CFd® DownSpray Stake Assembly with 300 mm Tube & Self Piercing Adaptor

Performance Chart

Pattern		360° 	
Nozzle Size & Colour	Pressure (kPa)	Flow (lph)	Diameter (m) at 250 mm Riser height
0.8 mm Black	50	16	0.6
	100	22	0.6
	150	27	0.5
	200	31	0.5
0.9 mm Brown	50	20	0.6
	100	28	0.5
	150	35	0.5
	200	41	0.5
1.0 mm Blue	50	24	0.6
	100	33	0.5
	150	41	0.5
	200	47	0.5
1.1 mm Grey	50	31	0.6
	100	44	0.6
	150	54	0.5
	200	63	0.5
1.5 mm Red	50	51	0.6
	100	73	0.6
	150	90	0.5
	200	104	0.5
2.1 mm Purple	50	96	0.6
	100	136	0.6
	150	165	0.5
	200	190	0.5

Ordering Information - CFd® DownSpray

Nozzle Size & Colour	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
0.8 mm Black	19005	100	90	14.4
0.9 mm Brown	19025	100	90	14.4
1.0 mm Blue	19015	100	90	14.4
1.1 mm Grey	19045	100	90	14.4
1.5 mm Red	19055	100	90	14.4
2.1 mm Purple	19065	100	90	14.4

Ordering Information - CFd® Galvanised Rod Wire Stake Assembly

Nozzle Size & Colour	Tube Length	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
0.8 mm Black	914 mm	43705	25	12	9.7
0.9 mm Brown	914 mm	43725	25	12	9.7
1.0 mm Blue	914 mm	43715	25	12	9.7
1.1 mm Grey	914 mm	43745	25	12	9.7
1.5 mm Red	914 mm	43755	25	12	9.7
2.1 mm Purple	914 mm	43765	25	12	9.7

Ordering Information - Galvanised Rod Wire Stake Assembly NEW

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Galvanised Wire Stake Assembly 300mm Rod w/ 914mm Tube & Adaptor	43735	25	12	9.2

Ordering Information - CFd® DownSpray Stake Assembly

Nozzle Size & Colour	Tube Length	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
1.0 mm Blue	300 mm	17515	25	16	11.1
1.0 mm Blue	914 mm	17615	25	10	8.5



CFd® DownSpray Range

Antelco Group of Companies

LINCOLN
— Est. 1959 —
MOULDING THE FUTURE

ANTELCO®

Dawn



Antelco Australia
Antelco Pty Ltd ABN 50 008 062 708
Sales & Marketing,
Orders & Warehouse
Research & Development
PO Box 95, 131 Tolley Rd,
St Agnes SA 5097 Australia
+61 8 8334 4333
adelaide@antelco.com.au

Antelco USA
Antelco Corporation
Sales & Marketing,
Orders & Warehouse
886 Waterway Pl,
Longwood,
Florida 32750 USA
+1 407 331 0699
info@antelco.com

Antelco Europe
Antelco UK Limited
Sales & Marketing,
Orders & Warehouse
17a Chartmoor Rd,
Leighton Buzzard,
Bedfordshire LU7 4WG UK
+44 152 585 9990
orders@antelco.co.uk